



RA2 24D

Features

- Torque 2 Nm
- For regulate dampers up to approx. 0.5 m²
- Power supply
24 Vac/dc for RA2 24D
220 Vac for RA2 220D
- Control signal on/off
- Running time 30-35 seconds
- Position indicator
- Direction of rotation changeable
via L/R switch outside damper actuator
- Supplied with 0.9 m cable
- Manual override by push button

Technical data


Torque	Not less than 2 Nm
Control signal	on/off
Power supply	
RA2 24D	24 Vac/dc
RA2 220D	220 Vac
Frequency	50/60 Hz
Running time	30-35 seconds
Operating power consumptions	
RA2 24D	2.0 W
RA2 220D	1.5 W
Stop power consumptions	0.75 W
Wiring size	
RA2 24D	3 VA
RA2 220D	1.5 VA
Rotation angle	Max 95°
Life cycle	60.000 cycles
Noise level	45dB(A)
Protection	IP 54
Ambient temperature	-20 to +50°C
Storage temperature	-40 to +70°C
Ambient humidity	5 to 95% rH
Approval	CE certificate
Weight	600 g

Auxiliary switch on request

Ordering

Type no.	Description
RA2 24D	Damper actuator, 2 Nm, 24 Vac/dc, with control signal on/off
RA2 220D	Damper actuator, 2 Nm, 220 Vac, with control signal on/off


Dimensions

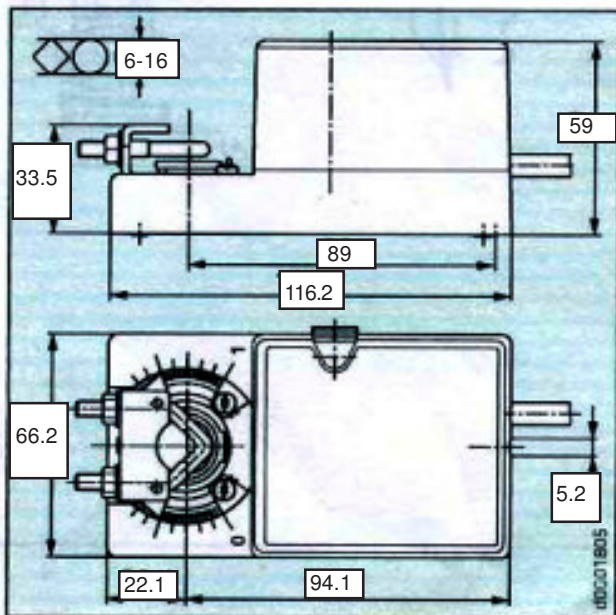


Minimum size and Maximum size for both round and square shaft is 6-16 mm.

Anti-rotation bracket provided for stability.

Wiring for RA2 24D and RA2 220D

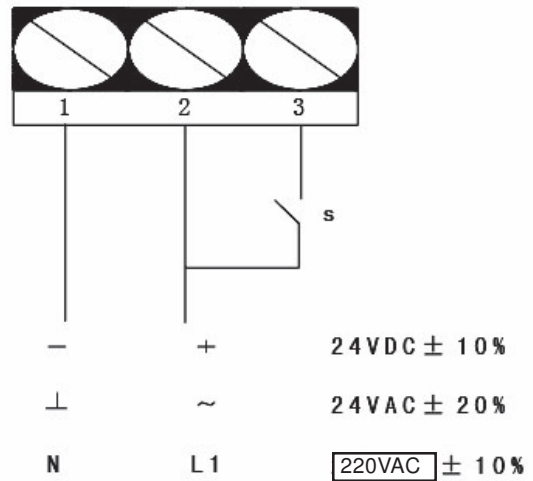

Wiring auxiliary switch wiring for RA2 24D S1 and RA2 220D S2

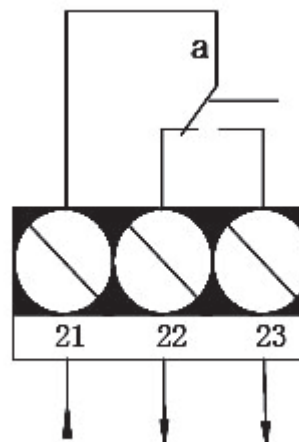

Auxiliary switch supplied on request
Types are RA2 24D S1 and RA2 220D S2.

We reserve the right to make changes in our products without any notice which may effect the accuracy of the information contained in this leaflet.